

Specifications

Housing

Extruded 6063 T6 aluminum Min 0.080" (2mm) max 0.410" (10mm) incorporating precision, no-weld clamp joint construction and sealed silicone raceway captive top.

Reflector

Optics are segmented, multifaceted and rotatable. Two (2) vertical and Three (3) horizontal area lighting distributions available are. VE, VS, FF, III, and II.

Lens / Frame

6063 T6 clear anodized extruded aluminum. For easy maintenance tool-less access and removal is standard. Self-hinge opens to 180 degrees. Flat tempered safety glass encased with EPDM gasket is standard.

Electrical

High power factor ballasts rated to -30° C (-20° F). 4 KV rated mogul base lamp holders are utilized for all other reflector types.

Finish

For long life, oven baked polyester powder coatings utilizing muti stage pre-treatment are supplied as standard. Hard color anodizing is optional.

Catalog Code

MDQX
Lamp

- 450 MHP 400 HPS
- 400 MHP 250, HPS
- 400 MH 200 HPS
- 350 MH 150 HPS
- 320 MHP
- 250, MHP 'P'- Pulse Lamp
- 250 MH
- 175 MHP
- 175 MH

Voltage

- 120, 208, 240, 277, 347, 480, 600

Distribution

- Vert. - VS, VE
- Horiz. - III, II, FF,

Lens

- Flat Glass (LG)
- Frosted Glass (FG)

Mounting

- Surface Mount (SM)
- Pole Mount (PM)
- Wall Mount (WM)
- Yoke Mount (YM)

Options

- Photo Control (PC)
- Quartz Restrike (Q)
- Fuse(s) (F)
- Modular Discon. (MD)
- House Side Sheild (HS)
- 12" Mounting Arm (AS12)
- 4" Mounting Arm (AS4)

Color / Finish

- Powder coat** White (WHI)
Black (MBK)
Bronze (BZS)
Special (SPC)
- Anodizing** Clear (CLA)
Black (MBA)
Bronze (BZA)


Mid Square 11

HID Cut-Off Luminaire
150watt - 400watt

Pole Mount



Yoke Mount

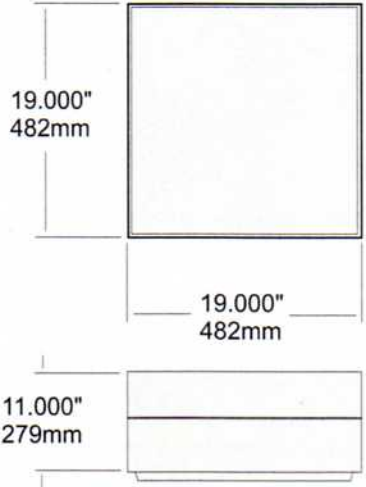

400w MH applications requires small envelope BT-28 / ED-28



Pappi Lighting

www.pappilighting.com Tel: 888-853-1139 Fax: 866-720-3015

