

Specifications

Housing

Extruded 6063 T6 aluminum Min 0.080" (2mm) max 0.410" (10mm) incorporating precision, no-weld clamp joint construction and sealed silicone raceway captive top.

Reflector

Optics are segmented, multifaceted and rotatable. Four (4) Area lighting distributions are available. Types are: FF, VQ, III, and II.

Lens / Frame

6063 T6 extruded aluminum alloy. Self-hinge that opens to 120 degrees. Single handed tool-less access and removal is standard. Tempered safety glass encased with EPDM gasket is standard.

Electrical

High power factor ballasts rated to -30°C (-20°F) mounted to tool-less entry, hinged 'heat-sink door' for increased ballast life. 4 KV rated mogul base lamp holders are utilized for all reflector types.

Finish

For long life, oven baked polyester powder coatings utilizing multi stage pre-treatment are supplied as standard. Hard color anodizing is optional.

Catalog Code

RF1	450 MHP	400 HPS
	400 MHP	250, HPS
	400 MH	200 HPS
Lamp	350 MH	
	320 MHP	
	250, MHP	'P'- Pulse Lamp
	250 MH	
Voltage	120, 208, 240,	
	277, 347, 480,	
	600	
Distribution	VQ, III, II, FF	
Lens	Flat Glass (LG)	
	Frosted Glass (FG)	
Mounting	Pole Mount (PM)	
	Wall Mount (WM)	
Options	Photo Control (PC)	
	Quartz Restrike (Q)	
	Fuse(s) (F)	
	Modular Discon. (MD)	
	House Side Sheild (HS)	
	12" Mounting Arm (AS12)	
	4" Mounting Arm (AS4)	
	Terminal Block (TB)	
	Charcoal Filter (CFT)	
Color / Finish	Powder coat White (WHI)	
	Black (MBK)	
	Bronze (BZS)	
	Special (SPC)	
	Anodizing Clear (CLA)	
	Black (MBA)	
	Bronze (BZA)	

00w MH applications requires small envelope BT-28


Rexform One

HID Cut-Off Luminaire

150 Watt - 400 Watt



Ballast life increases up to 50% due to the 'Heat-sink' cooling effect incorporated in every Rexform series luminaire.

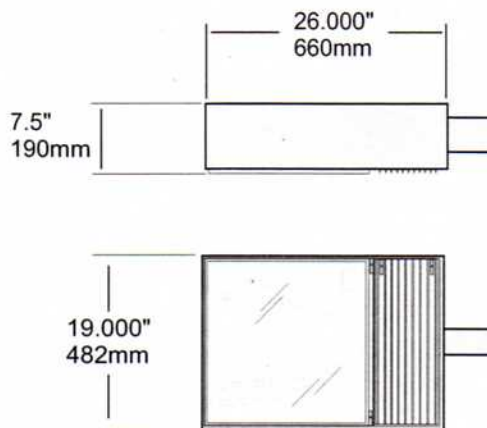

Pappi Lighting

www.pappilighting.com Tel: 888-853-1139 Fax: 866-720-3015



Listed for Wet Location