

# Specifications

## Housing

Extruded 6063 T6 aluminum Min 0.080" (2mm) max 0.410" (10mm) incorporating precision, no-weld clamp joint construction and sealed silicone raceway captive top.

## Reflector

Optics are segmented, multifaceted and rotatable. Six (6) Area lighting distributions are available. Types are: FF, VS, VE, VR, III, and II.

## Lens / Frame

6063 T6 extruded aluminum alloy. Self-hinge that opens to 120 degrees. Single handed tool-less access and removal is standard. Tempered safety glass encased with EPDM gasket is standard.

## Electrical

High power factor ballasts rated to -30°C (-20°F) mounted to tool-less entry, hinged 'heat-sink door' for increased ballast life. 4 KV rated medium base lamp holders are utilized for all reflector types.

## Finish

For long life, oven baked polyester powder coatings utilizing multi stage pre-treatment are supplied as standard. Hard color anodizing is optional.

# Catalog Code

RF2

Lamp Wattage

200, MHP	150HPS
175 MHP	100HPS
175MH	70HPS
150MH	50HPS
100MH	35HPS
70MH	
50MH	

--

Voltage

120, 208, 240,  
277, 347, 480,  
600

--

Distribution

Vert. lamp - VS, VE, VR,  
                  III, II,  
Hor. lamp - FF

--

Lens

Flat Glass (LG)  
Frosted Glass (FG)

--

Mounting

Pole Mount (PM)  
Wall Mount (WM)  
Davit Mount (DM)

--

Options

Photo Control (PC)  
Quartz Restrike (Q)  
Fuse(s) (F)  
Modular Discon. (MD)  
House Side Shield (HS)  
12" Mounting Arm (AS12)  
4" Mounting Arm (AS4)  
Terminal Block (TB)  
Charcoal Filter (CFT)

--


Color / Finish

**Powder coat** White (WHI)  
                  Black (MBK)  
                  Bronze (BZS)  
                  Special (SPC)  
**Anodizing** Clear (CLA)  
                  Black (MBA)  
                  Bronze (BZA)


# Rexform<sup>TM</sup> Two

HID Cut-Off Luminaire

35 Watt - 175 Watt

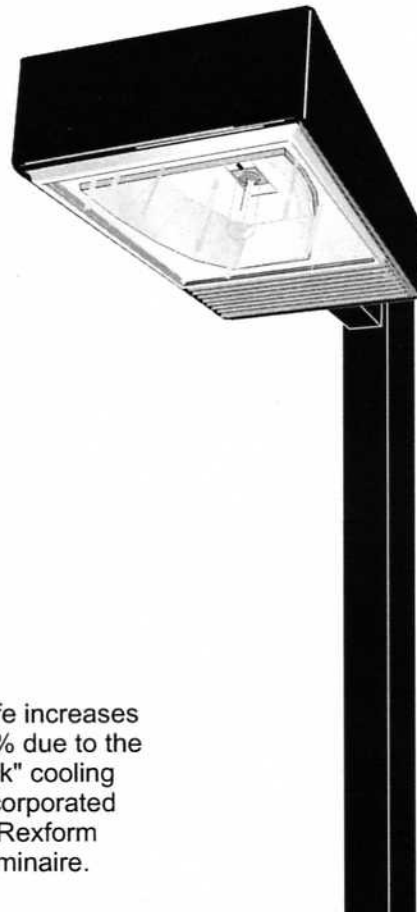

Ballast life increases up to 50% due to the 'Heat-sink' cooling effect incorporated in every Rexform series luminaire.

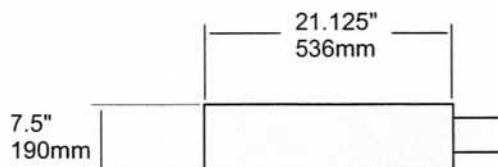

**Pappi Lighting**

www.pappilighting.com Tel: 888-853-1139 Fax: 866-720-3015



Listed for Wet Location