

Specifications

Housing

Extruded 6063 T6 aluminum Min 0.080" (2mm) max 0.410" (10mm) incorporating precision, no-weld clamp joint construction and sealed silicone raceway captive top.

Reflector

Optics are segmented, multifaceted and rotatable. Five (5) vertical position area lighting distributions are available: FF(IES 4), VS, VR, VE, III and II.

Lens / Frame

6063 T6 clear anodized extruded aluminum for easy maintenance tool-less access and removal is standard. Self-hinge opens to 180 degrees. Flat tempered safety glass edged encased with EPDM gasket is standard.

Electrical

High power factor ballasts rated to -30° C (-20° F). 4 KV rated medium base lamp holders are utilized for all reflector types.

Finish

For long life, oven baked polyester powder coatings utilizing multi stage pre-treatment are supplied as standard. Hard color anodizing is optional.

Catalog Code

MSQL	200, MH	150HPS
	175MH	100HPS
	150MH	70HPS
	100MH	50HPS
	70MH	35HPS
	50MH	
Lamp	120, 208, 240,	
	277, 347, 480,	
	600	
Voltage	VS, VE, VR, FF,	
	III, II	
Distribution	Flat Glass (LG)	
	Frosted Glass (FG)	
	Prismatic Glass (PG)	
Lens	Surface Mount (SM)	
	Pole Mount (PM)	
	Wall Mount (WM)	
	Yoke Mount (YM)	
Mounting	Photo Control (PC)	
	Quartz Restrike (Q)	
	Fuse(s) (F)	
	Modular Discon. (MD)	
	House Side Shield (HS)	
	12" Mounting Arm (AS12)	
	4" Mounting Arm (AS4)	
Options	Powder coat White (WHI)	
	Black (MBK)	
	Bronze (BZS)	
	Special (SPC)	
	Anodizing Clear (CLA)	
	Black (MBA)	
	Bronze (BZA)	
Color / Finish		


Minisquare

HID Cut-Off Luminaire
35watt - 200watt
High Performance Series


Pole Mount



Yoke Mount

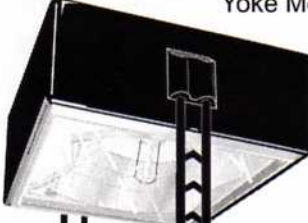

** 200 MH watt pulse lamp technology
(21,000 lumens - 15,000hrs)

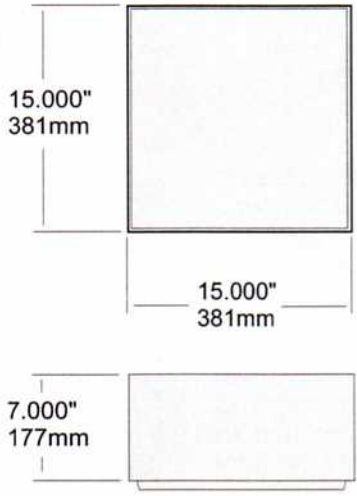

Pappi Lighting



Listed for Wet Location