

SPECIFICATIONS

LIGHT DISTRIBUTION III, VS

**HOUSING**

Heavy gauge extruded aluminum, internally sealed for weather proofing. Closed cell neoprene foam gasket is applied between lens frame and housing.

**LENS**

Clear polycarbonate sealed into mill finish extruded aluminum frame with silicone. Lens frame is hinged and secured with two stainless steel quarter turn fasteners.

**REFLECTOR**

Specular aluminum, available on type III and VS light distribution.

**BALLAST ASSEMBLY**

Ballast is high power factor mounted on aluminum tray. The assembly is removable as unit for easy maintenance.

**LAMP SOCKET**


Spring loaded center contact. Pulse rated for hps lamps.

**ARM**

Mounting arm is supplied with two rods and nuts for easy assembly of luminaire to pole.

**FINISH**

Polyester powder fuse coating is standard, other finishes available, contact factory.


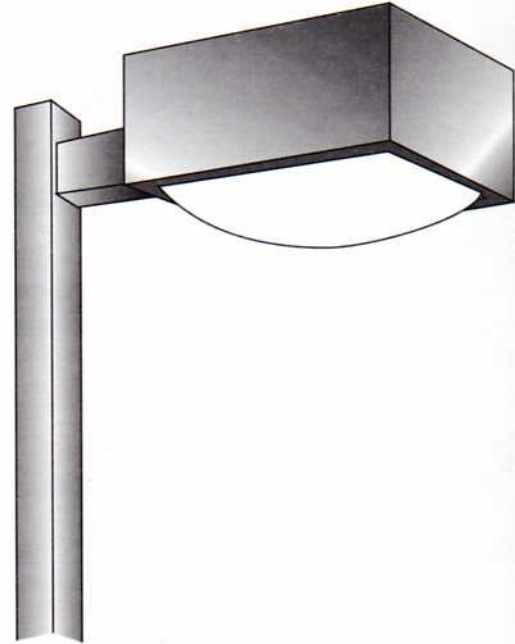


UL LISTED FOR WET LOCATION

MOUNTING STYLES

DIMENSIONAL DATA

ORDERING INFORMATION

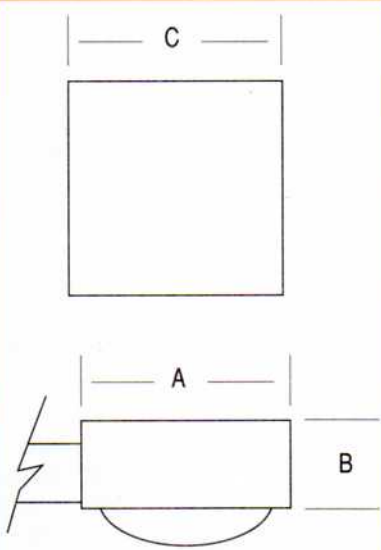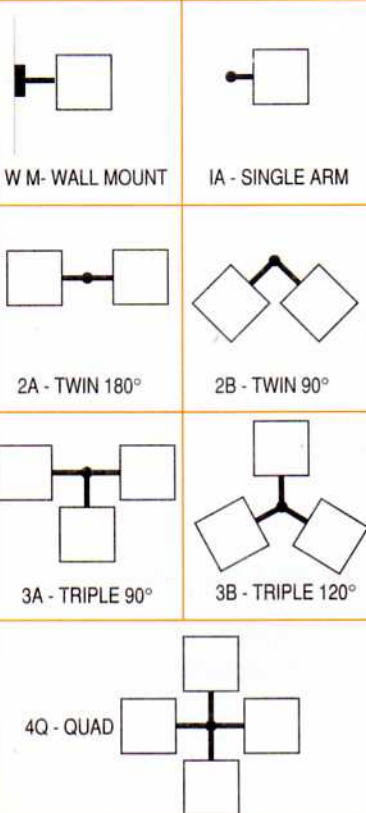

WATTAGE	A	B	C
50 THRU 150	16"	6"	16"
250 THRU 400	19"	6"	19"

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type  
V - Mercury Vapor  
H - Metal Halide  
S - High Pressure Sodium
- 5 Voltage  
120, 208, 240, 277, 480  
MT - Multi-tap (120, 208, 240, 277)
- 6 Light Distribution: III and VS
- 7 Finish  
BZ - Bronze  
BK - Black  
GN - Green  
WT - White  
(for any other color consult factory)
- 8 Options:  
RCP - Receptacle and Photo Control  
RC - Photo Cell Receptacle only  
PC - Photo Cell Only  
FS - Fuse

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE DISTRIBUTION FINISH OPTION  
**JA - 2A - 150 - H - MT - VS - BZ**