

4000 South Bell Avenue
Chicago
Illinois 60609
Phone: 773-254-7827
Facsimile: 773-254-6811

SPECIFICATIONS

- Housing** 14 ga. cold rolled steel internally reinforced to provide double wall thickness at ends and corners.
- Door Frame** One piece die formed 14 ga. cold rolled steel.
- Frame Fasteners** Oval head stainless steel tamperproof screws to secure frame in place. (4) per frame.
- Sign Panel** 1/8" polycarbonate screen printed as required and secured to frame with positive clamp action.
- Arrow Covers** Internally removable to permit field changing to meet all arrow conditions. (2) per door frame.
- Down Light Lens** 1/4" thick clear prismatic polycarbonate secured in place with positive clamp action.
- Finish** All metal parts phosphate pre-treated and finished in oven baked polyester powder coat. Internal parts finished in white. Housing and door frame finished in white.
- Lamps** L.E.D.
- Emergency** Self contained solid state circuit with sealed high temperature nickel cadmium batteries to provide 90 minutes of emergency illumination.



ORDERING INFORMATION



Catalog No.	Description
62 - SF - LED	Single face L.E.D.
62 - DF - LED	Double face L.E.D.

OPTIONS

GW	Green letters on white background
EL	Emergency battery pack
OH/D	Oval head tamperproof screwdriver

- ▶ Red letters on white background and 120 volt is standard.
- ▶ Tamperproof screwdriver not included with fixture and must be ordered as a separate item.

CROSS SECTION DETAILS

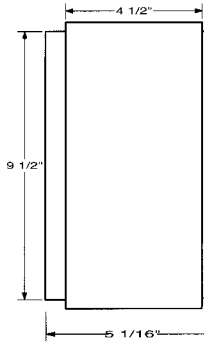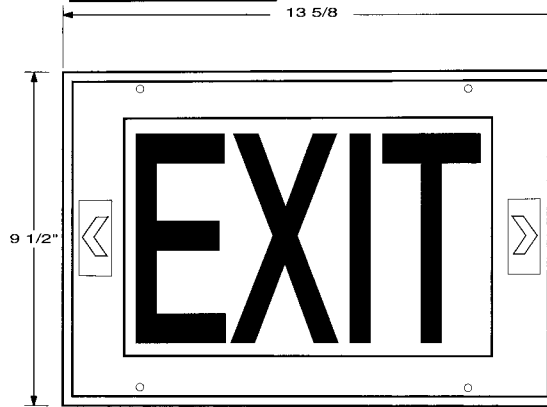

MOUNTING DIMENSIONS

