

SPECIFICATIONS

LIGHT DISTRIBUTION V

HOUSING _____
 Heavy gauge extruded aluminum with internal cast aluminum base.

LENS _____
 .250" thick, clear polycarbonate.


REFLECTOR _____
 Specular aluminum, type V light distribution.

BALLAST ASSEMBLY _____
 Ballast is high power factor mounted on aluminum tray.

LAMP SOCKET _____
 Medium base, spring loaded center contact.

ANCHOR BOLTS _____
 Three 1/2" x 10" x 2" galvanized.


FINISH _____
 Polyester powder fuse coating is standard, other finishes available, contact factory.

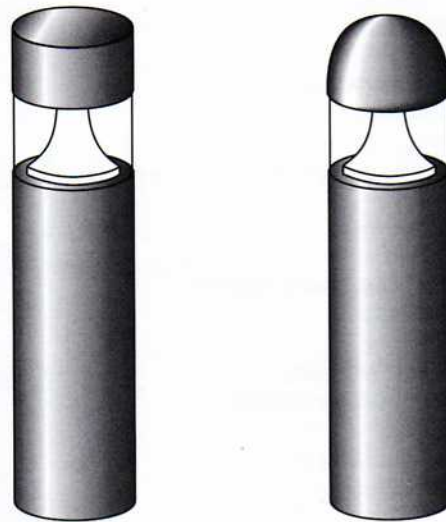

UL LISTED FOR WET LOCATION

DIMENSIONAL DATA

ORDERING INFORMATION

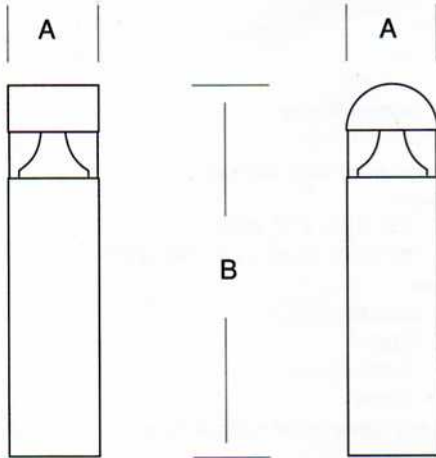

FT - FLAT TOP

RT - ROUND TOP

- 1 Series
- 2 Top
 FT - Flat Top
 RT - Round Top
- 3 Wattage
- 4 Lamps Type
 V - Mercury Vapor
 H - Metal Halide
 S - High Pressure Sodium
- 5 Voltage
 120, 208, 240, 277, 480
 MT - Multi-tap (120, 208, 240, 277)
- 6 Finish
 BZ - Bronze
 BK - Black
 GN - Green
 WT - White
 (for any other color consult factory)
- 7 Options:
 HS - House Shield
 FS - Fuse

WATTAGE

A

B

35 THRU 175

8"

42"

EXAMPLE

SERIES TOP WATTAGE LAMP TYPE VOLTAGE FINISH OPTION
 BD FT 100 S 120 BK HS