


SPECIFICATIONS


- HOUSING** _____
Heavy gauge aluminum with internal cast aluminum base.
- LENS** _____
.250" thick impact resistant clear acrylic.
- REFLECTOR** _____
Specular aluminum, type V light distribution.
- BALLAST ASSEMBLY** _____
Ballast is high power factor mounted on aluminum tray.
- LAMP SOCKET** _____
Medium base, spring loaded center contact.
- ANCHOR BOLTS** _____
Three 1/2" x 10" x 2" galvanized.
- FINISH** _____
Polyester powder fuse coating is standard, other finishes available, contact factory.

LIGHT DISTRIBUTION V

BE SERIES




BF SERIES



UL LISTED FOR WET LOCATION

DIMENSIONAL DATA

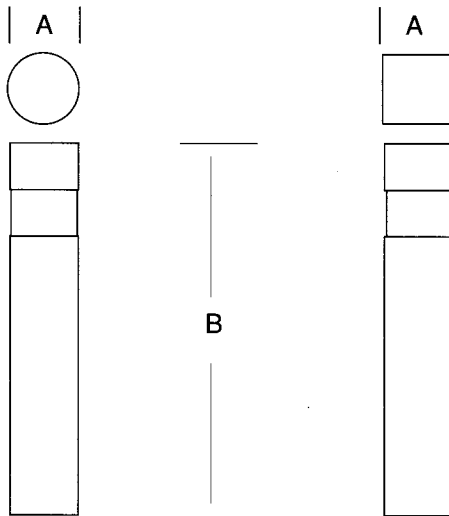

ORDERING INFORMATION

- 1 Series
- 2 Wattage
- 3 Lamps Type
V - Mercury Vapor
H - Metal Halide
S - High Pressure Sodium
- 4 Voltage
120, 208, 240, 277, 480
MT - Multi-tap (120, 208, 240, 277)
- 5 Finish
BZ - Bronze
BK - Black
GN - Green
WT - White
(for any other color consult factory)
- 6 Options:
HS - House Shield
FS - Fuse

WATTAGE	A	B
35 THRU 175	8"	42"

EXAMPLE SERIES WATTAGE LAMP TYPE VOLTAGE FINISH OPTION
 BE 50 S 120 GN