

SPECIFICATIONS

**HOUSING** \_\_\_\_\_  
 Heavy gauge extruded aluminum with cast aluminum louvers and internal cast aluminum base.

**LENS** \_\_\_\_\_  
 Impact resistant clear acrylic.

**BALLAST ASSEMBLY** \_\_\_\_\_  
 Ballast is high power factor mounted on aluminum tray.

**LAMP SOCKET** \_\_\_\_\_  
 Medium base, spring loaded center contact.


**ANCHOR BOLTS** \_\_\_\_\_  
 Three 1/2" x 10" x 2" galvanized.

**FINISH** \_\_\_\_\_  
 Polyester powder fuse coating is standard, other finishes available, contact factory.


UL LISTED FOR WET LOCATION

LIGHT DISTRIBUTION V

**BG SERIES**

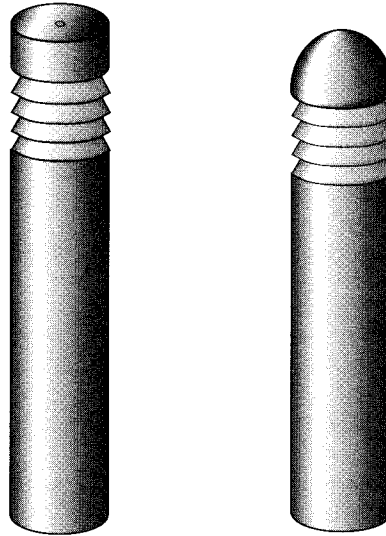

DIMENSIONAL DATA

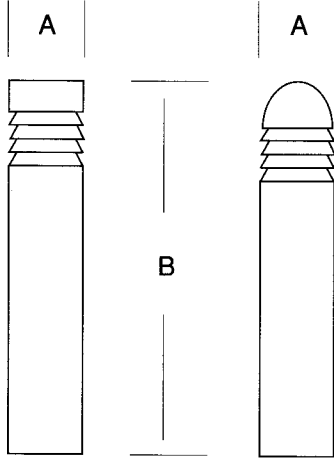

FT-FLAT TOP

RT-ROUND TOP

WATTAGE

A

B

35 THRU 175

8"

42"

ORDERING INFORMATION

- 1 Series
- 2 Top  
 FT - Flat Top  
 RT - Round Top
- 3 Wattage
- 4 Lamps Type  
 V - Mercury Vapor  
 H - Metal Halide  
 S - High Pressure Sodium
- 5 Voltage  
 120, 208, 240, 277, 480  
 MT - Multi-tap (120, 208, 240, 277)
- 6 Finish  
 BZ - Bronze  
 BK - Black  
 GN - Green  
 WT - White  
 (for any other color consult factory)
- 7 Options:  
 HS - House Shield  
 FS - Fuse

EXAMPLE

SERIES TOP WATTAGE LAMP TYPE VOLTAGE FINISH OPTION  
 BG - RT - 150 - S - 120 - BZ