

BM SERIES

HOUSING _____

8" sq. heavy gauge aluminum with cast aluminum louvers and internal cast aluminum base.

LENS _____

.250" thick impact resistant clear acrylic.

BALLAST ASSEMBLY _____

Ballast is high power factor mounted on aluminum tray.

WATTAGE _____

35 through 150.

LAMP SOCKET _____


Medium base, spring loaded center contact.

ANCHOR BOLTS _____

Three 1/2" x 10" x 2" galvanized.

FINISH _____

Polyester powder fuse coating is standard, other finishes available, contact factory.

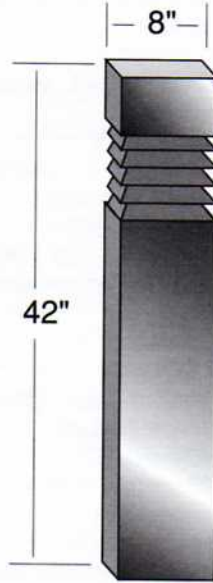

UL LISTED FOR WET LOCATION

BN SERIES

HOUSING _____

5" dia. heavy ga. extruded aluminum with cast aluminum louvers and internal cast aluminum base.

LENS _____

Clear glass.

BALLAST ASSEMBLY _____

Ballast is high power factor mounted on aluminum tray.

WATTAGE _____

35 through 150.

LAMP SOCKET _____


Medium base, spring loaded center contact.

ANCHOR BOLTS _____

Three 1/2" x 10" x 2" galvanized.

FINISH _____

Polyester powder fuse coating is standard, other finishes available, contact factory.

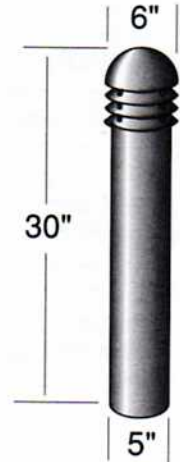

UL LISTED FOR WET LOCATION

BO SERIES

HOUSING _____

6" heavy gauge extruded aluminum with cast aluminum louvers and internal cast aluminum base.

LENS _____

.125" thick impact resistant white acrylic.

BALLAST ASSEMBLY _____

Ballast is high power factor mounted on aluminum tray.

WATTAGE _____

35 through 150.

LAMP SOCKET _____

Medium base, spring loaded center contact

ANCHOR BOLTS _____

Three 1/2" x 10" x 2" galvanized.

FINISH _____

Polyester powder fuse coating is standard, other finishes available, contact factory.



UL LISTED FOR WET LOCATION

ORDERING INFORMATION

- 1 Series
- 2 Wattage
- 3 Lamps Type
V - Mercury Vapor
H - Metal Halide
S- High Pressure Sodium
- 4 Voltage
120, 208, 240, 277, 480
MT - Multi-tap (120, 208, 240, 277)
- 5 Finish
BZ - Bronze
BK - Black
GN - Green
WT - White
(for any other color consult factory)
- 6 Options:
HS - House Shield
FS - Fuse

EXAMPLE SERIES WATTAGE LAMP TYPE VOLTAGE FINISH OPTION
 BN - 35 - S - 120 - BK