

**SPECIFICATIONS**

**HOUSING** \_\_\_\_\_  
Heavy gauge spun aluminum.

**LENS** \_\_\_\_\_  
Clear polycarbonate dome.

**REFRACTOR** \_\_\_\_\_  
Clear prismatic glass, type V light distribution.

**BALLAST ASSEMBLY** \_\_\_\_\_  
Ballast is high power factor mounted on aluminum tray.  
The assembly is removable as unit for easy maintenance.


**WATTAGE** \_\_\_\_\_  
50 thru 175.

**LAMP SOCKET** \_\_\_\_\_  
Spring loaded center contact.  
Pulse rated for hps lamps.

**ARM** \_\_\_\_\_  
1-5/8" O.D. extruded aluminum.

**FINISH** \_\_\_\_\_  
Polyester powder fuse coating is standard, other finishes available, contact factory.

**LIGHT DISTRIBUTION V**

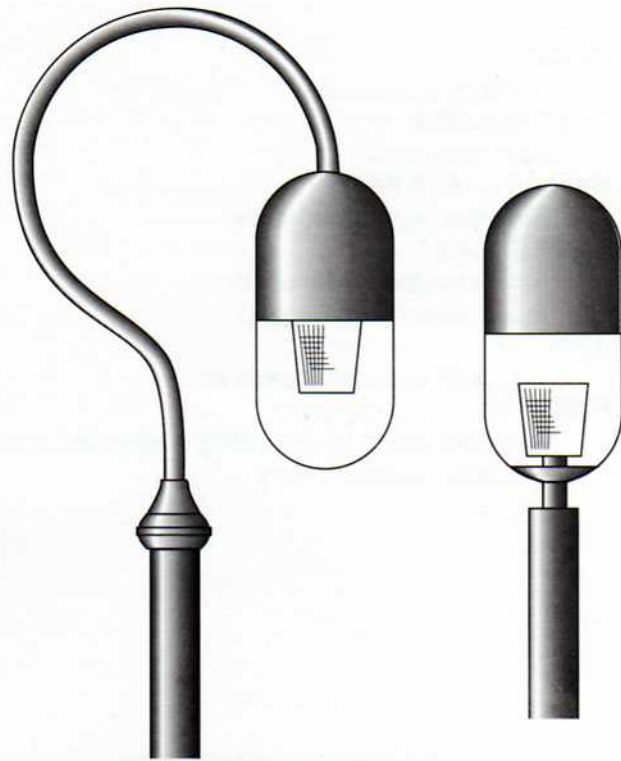


UL LISTED FOR WET LOCATION

**MOUNTING STYLES**

**DIMENSIONAL DATA**

**ORDERING INFORMATION**

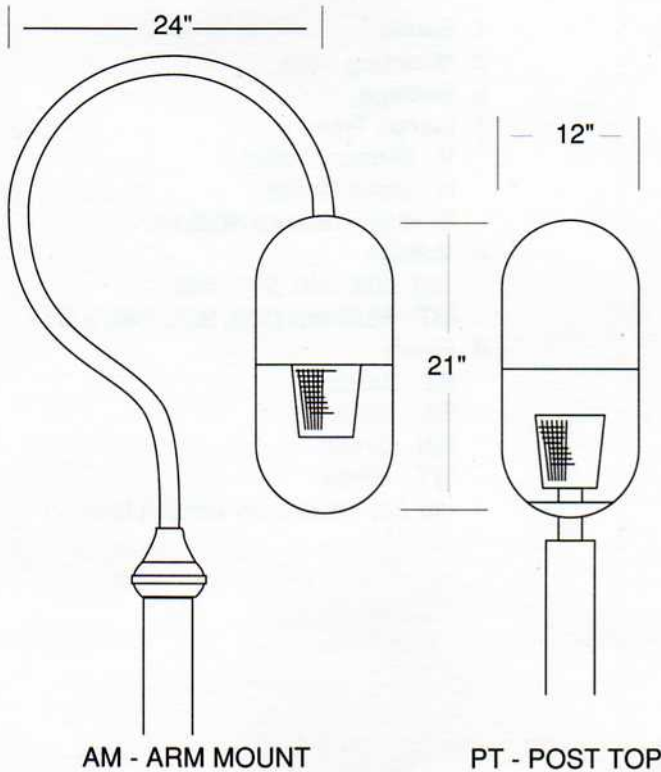

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type  
V - Mercury Vapor  
H - Metal Halide  
S - High Pressure Sodium
- 5 Voltage  
120/240, 208/277, 480  
MT - Multi-tap (120, 208, 240, 277)
- 6 Finish  
BZ - Bronze  
BK - Black  
GN - Green  
WT - White  
(for any other color consult factory)
- 7 Option  
WL - White Lens

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE FINISH OPTION  
ES - AM - 150 - S - 277 - BK