

SPECIFICATIONS

LIGHT DISTRIBUTION III & V

HOUSING _____

Heavy gauge spun aluminum.

LENS _____

Clear polycarbonate.

REFLECTOR _____

Specular aluminum type III and V light distribution.

BALLAST ASSEMBLY _____

Ballast is high power factor mounted on aluminum tray.

LAMP SOCKET _____

Spring loaded center contact.


Pulse rated for hps lamps.

ARM _____

1-5/8" O.D. extruded aluminum.

FINISH _____

Polyester powder fuse coating is standard, other finishes available, contact factory.

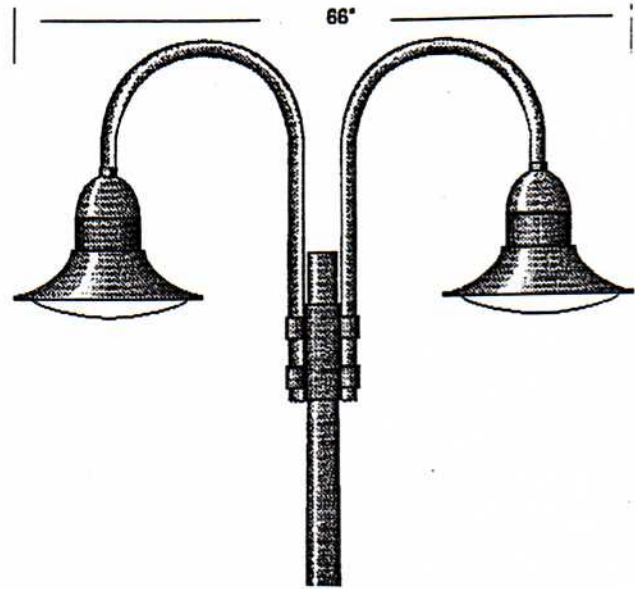

UL LISTED FOR WET LOCATION

MOUNTING STYLES

DIMENSIONAL DATA

ORDERING INFORMATION




WM - WALL MOUNT




1A - SINGLE ARM




2A - TWIN 180°




2B - TWIN 90°




3A - TRIPLE 90°



3B - TRIPLE 120°



4Q - QUAD

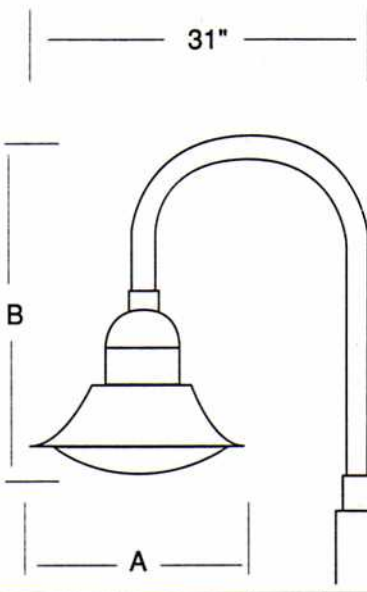

WATTAGE	A	B	C
50 THRU 175	24"	18"	31"

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type
V - Mercury Vapor
H - Metal Halide
S - High Pressure Sodium
- 5 Voltage
120, 208, 240, 277, 480
MT - Multi-tap (120, 208, 240, 277)
- 6 Light Distribution: III, V
- 7 Finish
BZ - Bronze
BK - Black
GN - Green
WT - White
(for any other color consult factory)

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE DISTRIBUTION FINISH
 FL - 2B - 150 - S - 208 - V - WT