

SPECIFICATIONS

**HOUSING** \_\_\_\_\_  
 Heavy gauge die-formed welded aluminum.

**LENS** \_\_\_\_\_  
 Clear prismatic polycarbonate.

**BALLAST ASSEMBLY** \_\_\_\_\_  
 Ballast is high power factor mounted on aluminum tray.  
 The assembly is removable as unit for easy maintenance.

**WATTAGE** \_\_\_\_\_  
 50 thru 175.

**LAMP SOCKET** \_\_\_\_\_  
 Spring loaded center contact.  
 Pulse rated for HPS lamps.

**ARM** \_\_\_\_\_  
 2"X4" extruded aluminum.

**WALL PLATE** \_\_\_\_\_  
 5"X9" cast aluminum.

**FINISH** \_\_\_\_\_  
 Polyester powder fuse coating is standard, other finishes available, contact factory.

LIGHT DISTRIBUTION V




UL LISTED FOR WET LOCATION


MOUNTING STYLES

DIMENSIONAL DATA


ORDERING INFORMATION



PT - POST TOP



WM - WALL MOUNT

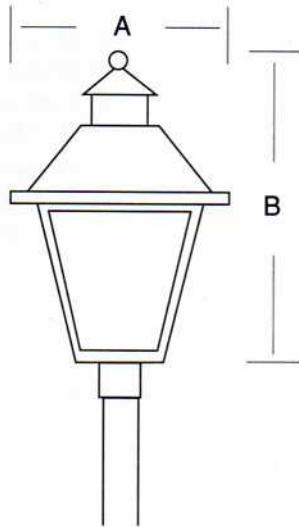

WATTAGE	A	B
50 thru 175	12"	16"
250	18"	24"

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type  
 V - Mercury Vapor  
 H - Metal Halide  
 S - High Pressure Sodium
- 5 Voltage  
 120, 208, 240, 277, 480  
 MT - Multi-tap (120, 208, 240, 277)
- 6 Finish  
 BZ - Bronze  
 BK - Black  
 GN - Green  
 WT - White  
 (for any other color consult factory)
- 7 Options:  
 WL - White Acrylic Lens  
 P - Photo Cell Only  
 FS - Fuse  
 HS - House Shield

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE FINISH OPTION  
 IL - PT - 175 - H - 240 - BK