

### SPECIFICATIONS

**HOUSING** \_\_\_\_\_

Heavy wall cast aluminum frame and top.

**LENS** \_\_\_\_\_

.125" thick clear prismatic polycarbonate.

**BALLAST ASSEMBLY** \_\_\_\_\_

Ballast is high power factor mounted on aluminum tray.  
The assembly is removable as unit for easy maintenance.

**LAMP SOCKET** \_\_\_\_\_

Spring loaded center contact.  
Pulse rated for hps lamps.

**ARM** \_\_\_\_\_

Heavy wall cast aluminum.

**FINISH** \_\_\_\_\_

Polyester powder fuse coating is standard, other finishes available, contact factory.

### LIGHT DISTRIBUTION V








UL LISTED FOR WET LOCATION

### MOUNTING STYLES

### DIMENSIONAL DATA

### ORDERING INFORMATION

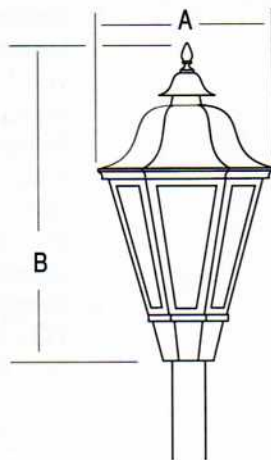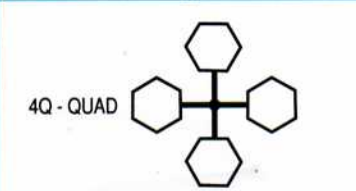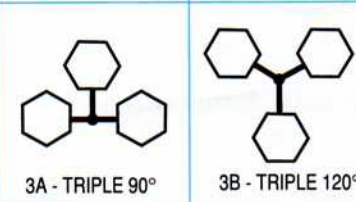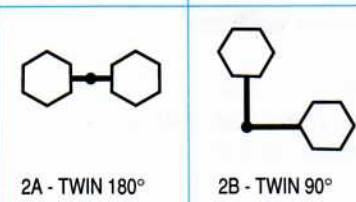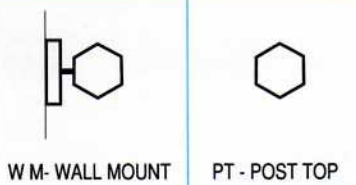

WATTAGE	A	B	EPA
50 THRU 100	14"	29"	.64
150 THRU 250	20"	41"	.1.5

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type  
V - Mercury Vapor  
H - Metal Halide  
S - High Pressure Sodium
- 5 Voltage  
120, 208, 240, 277, 480  
MT - Multi-tap (120, 208, 240, 277)
- 6 Finish  
VG - Verde Green  
GN - Green  
BK - Black  
BZ - Bronze  
(for any other color consult factory)
- 7 Options:  
GR - Glass Refractor and Clear Lens  
CL - Clear Lens  
WL - White Lens  
PC - Photo Cell Only  
FS - Fuse  
HS - House Shield

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE FINISH OPTION  
MV - PT - 250 - H - MT - GN - GR