

SPECIFICATIONS

REFLECTOR _____

Heavy gauge spun aluminum.

GLOBE _____

12" diameter white polycarbonate.

REFRACTOR _____

12" diameter clear prismatic acrylic.

BALLAST ASSEMBLY _____

Ballast is high power factor mounted on aluminum tray.

LAMP SOCKET _____

Spring loaded center contact.

Pulse rated for hps lamps.

ARM _____

1-5/8" O.D. extruded aluminum.

FINISH _____

Polyester powder fuse coating is standard, other finishes available, contact factory.

LIGHT DISTRIBUTION V



RC



RB




RA

UL LISTED FOR WET LOCATION

MOUNTING STYLES

DIMENSIONAL DATA


ORDERING INFORMATION



WM - WALL MOUNT




1A - SINGLE ARM



2A - TWIN 180°




2B - TWIN 90°




3A - TRIPLE 90°




3B - TRIPLE 120°



4Q - QUAD



SM - STEM MOUNT

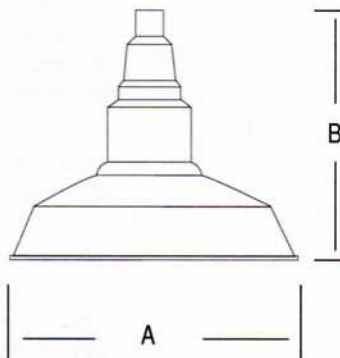

WATTAGE

A

B

50 THRU 175

20"

14"

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type
 - I - Incandescent
 - V - Mercury Vapor
 - H - Metal Halide
 - S - High Pressure Sodium
- 5 Voltage
 - 120, 208, 240, 277, 480
 - MT - Multi-tap (120, 208, 240, 277)
- 6 Finish
 - BZ - Bronze
 - BK - Black
 - GN - Green
 - WT - White

(for any other color consult factory)

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE FINISH
 RA - 2A - 150 - S - 120 - BK