

SPECIFICATIONS

LIGHT DISTRIBUTION V

**SPHERE** \_\_\_\_\_  
White polycarbonate.

**SPHERE HOLDER** \_\_\_\_\_  
Cast aluminum.

**GUARD** \_\_\_\_\_  
Cast aluminum.

**BALLAST ASSEMBLY** \_\_\_\_\_  
Ballast is high power factor.

**LAMP SOCKET** \_\_\_\_\_  
Spring loaded center contact.  
Pulse rated for hps lamps.

**ARM** \_\_\_\_\_  
1-3/4" X 3" extruded aluminum.

**FINISH** \_\_\_\_\_  
Polyester powder fuse coating is standard, other finishes available, contact factory.





UL LISTED FOR WET LOCATION

MOUNTING STYLES

DIMENSIONAL DATA

ORDERING INFORMATION

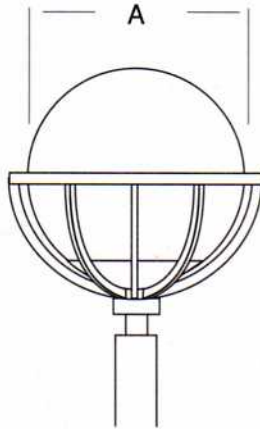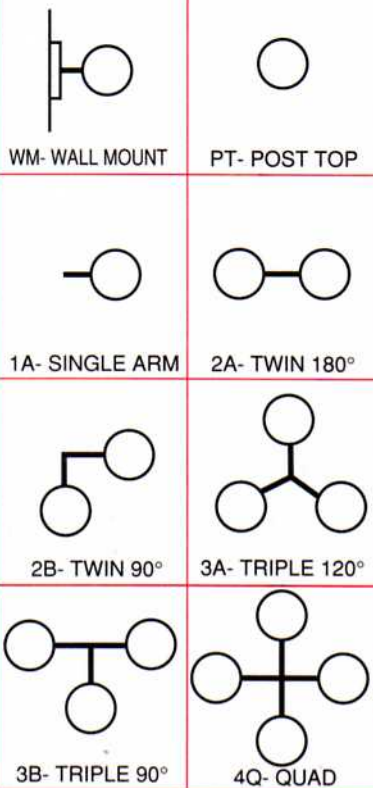

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type  
V - Mercury Vapor  
H - Metal Halide  
S- High Pressure Sodium
- 5 Voltage  
120, 208, 240, 277, 480  
MT - Multi-tap (120, 208, 240, 277)
- 6 Finish  
BZ - Bronze  
BK - Black  
GN - Green  
WT - White  
(for any other color consult factory)

WATTAGE	A
50 THRU 150	16"
175 THRU 250	20"

EXAMPLE      SERIES      MOUNTING      WATTAGE      LAMP TYPE      VOLTAGE      FINISH

SG - 2A - 70 - S - 277 - BK