


SPECIFICATIONS


- HOUSING** _____
Heavy gauge spun aluminum.
- LENS** _____
Clear tempered glass.
- REFLECTOR** _____
Heavy gauge spun aluminum attached to housing with 8 brass spacers.
- BALLAST ASSEMBLY** _____
Ballast is high power factor mounted on aluminum tray.
- LAMP SOCKET** _____
Spring loaded center contact.
Pulse rated for hps lamps.
- ARM** _____
1-5/8" extruded aluminum.
- FINISH** _____
Polyester powder fuse coating is standard, other finishes available, contact factory.

LIGHT DISTRIBUTION V

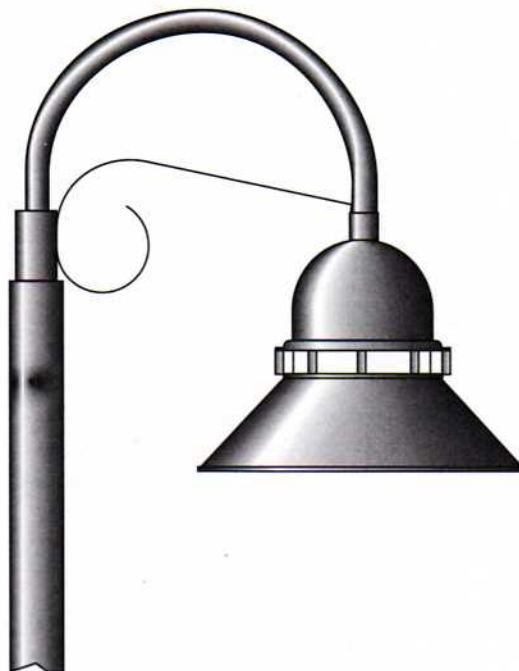

UL LISTED FOR WET LOCATION

MOUNTING STYLES

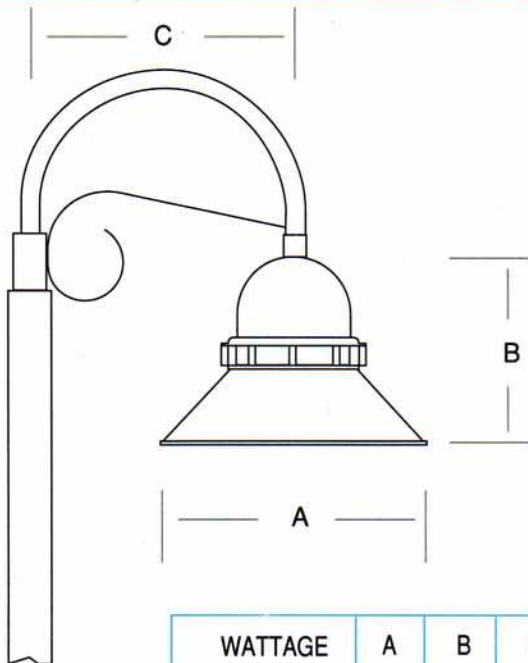

WATTAGE	A	B	C
50 THRU 175	24"	16"	24"

ORDERING INFORMATION

- 1 Series
- 2 Wattage
- 3 Lamps Type
V - Mercury Vapor
H - Metal Halide
S- High Pressure Sodium
- 4 Voltage
120, 208, 240, 277, 480
MT - Multi-tap (120, 208, 240, 277)
- 5 Finish
BZ - Bronze
BK - Black
GN - Green
WT - White
(for any other color consult factory)

EXAMPLE

SERIES WATTAGE LAMP TYPE VOLTAGE FINISH
WY - 175 - H - MT - GN