

SPECIFICATIONS

LIGHT DISTRIBUTION FT

HOUSING

Heavy wall extruded aluminum, internally sealed for weather proofing. Closed cell neoprene foam gasket is applied between lens frame and housing.

LENS

Sealed into mill finish spun aluminum frame with silicone. Lens frame is hinged and secured with two stainless steel quarter turn fasteners.

REFLECTOR

Specular aluminum, available on type FT light distribution.

BALLAST ASSEMBLY

Ballast is high power factor mounted on aluminum tray. The assembly is removable as unit for easy maintenance.

ARM

Heavy wall extruded aluminum with mounting plate.

FINISH

Polyester powder fuse coating is standard, other finishes available, contact factory.



UL LISTED FOR WET LOCATION



MOUNTING STYLES

DIMENSIONAL DATA


ORDERING INFORMATION



FM - FLAT WALL MOUNT

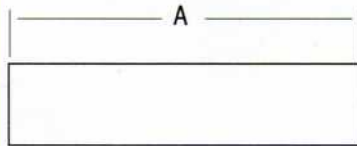

AM - ARM WALL MOUNT



WATTAGE	A	B	C
35 THRU 55	20"	6"	14"
90	24"	6"	16"
135	34"	6"	16"
180	48"	6"	16"

- 1 Series
- 2 Mounting Style
- 3 Wattage
- 4 Lamps Type
L - Low Pressure Sodium
- 5 Voltage
120/240, 208/277, 480
- 6 Finish
BZ - Bronze
BK - Black
GN - Green
WT - White
(for any other color consult factory)
- 7 Options:
RCP - Receptacle and Photo Control
RC - Photo Cell Receptacle only
PC - Photo Cell Only
FS - Fuse

EXAMPLE

SERIES MOUNTING WATTAGE LAMP TYPE VOLTAGE FINISH OPTION

DW - FM - 55 - L - 120 - WT - RC