

SPECIFICATIONS

**HOUSING** \_\_\_\_\_

Die formed; heavy gauge welded aluminum.

**LENS** \_\_\_\_\_

3/16" clear tempered glass.

**REFLECTOR SYSTEM** \_\_\_\_\_

Specular aluminum.

**BALLAST ASSEMBLY** \_\_\_\_\_

Ballast is high power factor mounted on aluminum tray.


**LAMP SOCKET** \_\_\_\_\_

Spring loaded center contact.

Pulse rated for hps lamps.


**FINISH** \_\_\_\_\_

Polyester powder fuse coating is standard, other finishes available, contact factory.

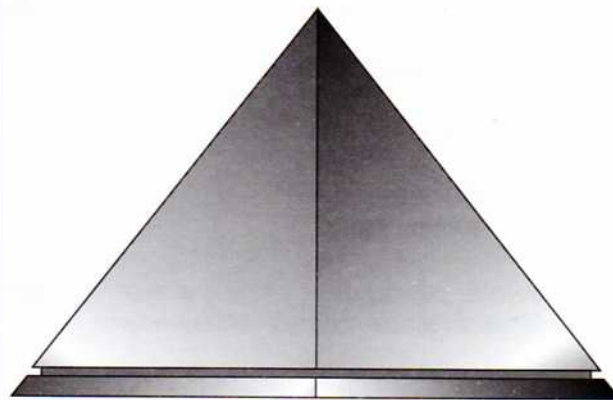

UL LISTED FOR WET LOCATION

DIMENSIONAL DATA

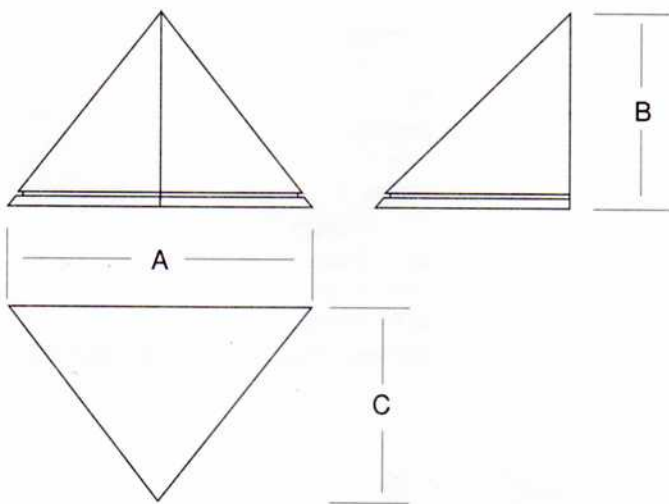

WATTAGE	A	B	C
35	13"	9"	9"
50	16"	11"	11"
70 THRU 150	20"	14"	14"
175 THRU 250	29-1/2"	25-5/8"	21"

ORDERING INFORMATION

- 1 Series
- 2 Wattage
- 3 Lamps Type  
V - Mercury Vapor  
H - Metal Halide  
S - High Pressure Sodium
- 4 Voltage  
120, 208, 240, 277, 480  
MT - Multi-tap (120, 208, 240, 277)
- 5 Finish  
BZ - Bronze  
BK - Black  
GN - Green  
WT - White  
VG - Verde Green  
(for any other color consult factory)

EXAMPLE    SERIES    WATTAGE    LAMP TYPE    VOLTAGE    FINISH  
 WK - 150 - S - MT - BK