

SPECIFICATIONS

**HOUSING** \_\_\_\_\_  
 Heavy gauge die formed welded aluminum.  
 Aluminum door with vertical louvers.

**LENS** \_\_\_\_\_  
 .188" thick clear tempered glass.


**REFLECTOR SYSTEM** \_\_\_\_\_  
 Specular aluminum.

**WATTAGE** \_\_\_\_\_  
 175 W. maximum.

**BALLAST ASSEMBLY** \_\_\_\_\_  
 Ballast is high power factor mounted on aluminum tray.


**LAMP SOCKET** \_\_\_\_\_  
 Spring loaded center contact.  
 Pulse rated for hps lamps.

**FINISH** \_\_\_\_\_  
 Polyester powder fuse coating is standard, other finishes available, contact factory.



UL LISTED FOR WET LOCATION

DIMENSIONAL DATA

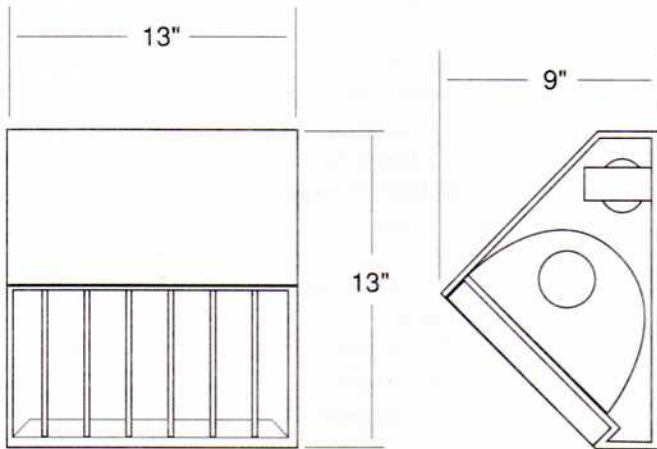

ORDERING INFORMATION

- 1 Series
- 2 Wattage
- 3 Lamps Type  
 V - Mercury Vapor  
 H - Metal Halide  
 S- High Pressure Sodium
- 4 Voltage  
 120, 208, 240, 277, 480  
 MT - Multi-tap (120, 208, 240, 277)
- 5 Finish  
 BZ - Bronze  
 BK - Black  
 GN - Green  
 WT - White  
 (for any other color consult factory)
- 6 Options  
 PC - Photo cell only  
 FS - Fuse

EXAMPLE    SERIES    WATTAGE    LAMP TYPE    VOLTAGE    FINISH    OPTION  
 WN - 70 - S - 120 - BK - PC